

SUSPENDED SUBSTRATE HIGHPASS FILTER 11SSHFP / 2500-U18000 / SM-SM


• **Features :**

- Excellent VSWR
- Perfect Temperature Stability




• **Specifications :**

- Insertion Loss :
 2.5 to 18 GHz < 1.0 dB
- VSWR :
 2.5 to 18 GHz 2.0:1
- Stopband :
 DC to 1.5 GHz ≥ 40 dB
- Connectors : SMA (Male/Male)
- Dimensions : 0.98" x 0.69" x 0.40"
 (24.9 x 17.5 x 10.16 mm)
- Operating Temperature : -55°C to +85°C
- Shock : 20 G's, ½ sine, 11 ms
- Vibration : 10 G's, 10 Hz – 2000 Hz
- Relative Humidity : 0 - 95 %

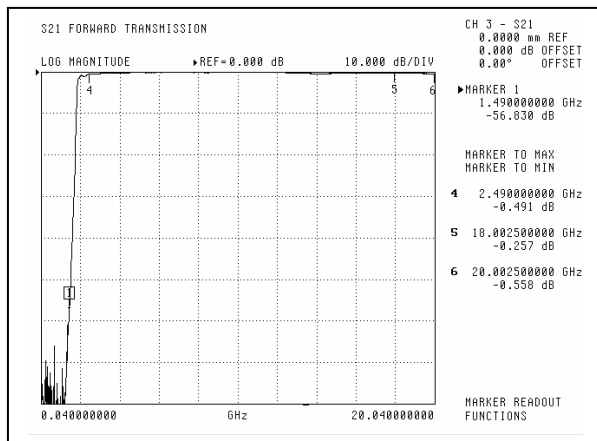

Amplitude Response

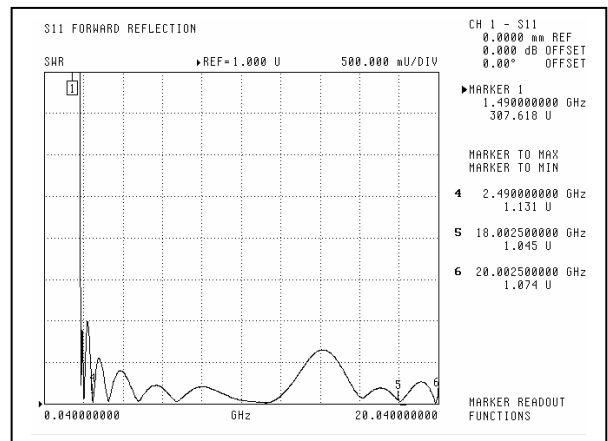

VSWR Response

Specific applications are available on request. Contact us for more information.